


Kerabit Damp-proof courses

Päivitetty 27.6.2019 Tulostettu 4.7.2020

Kerabit Damp-proof courses are intended to serve as capillary breaks between the footing and the foundation as well as between the foundation and walls. The strips are made of SBS-bitumen and they feature a sand or powder coating.

A wide range of sizes is available, with some products suitable for torching.

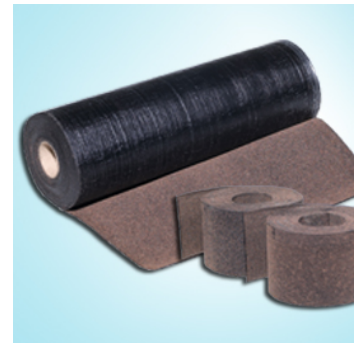

Technical data

Manufacturer / Manufactured for	Nordic Waterproofing Oy, Lohja factory
Country of origin	Finland
Conformity marking	CE mark
Quality control	Quality control agreement between the Plant and Eurofins Expert Services Oy
Specific thickness	2,2 - 4,4 mm depending on the product
Nominal weight	2100 - 5000 g/m ² depending on the product
Surface type	sand or slate granule
Rolls size	0,1x10 m, 0,15x10 m, 0,20x10 m, 0,2x8 m torch-on, 0,25x10 m, 0,33x8 m torch-on or 0,5x8 m torch-on

Additional information

Application

Kerabit Damp-proof courses are intended to serve as capillary breaks between the footing and the foundation as well as between the foundation and walls.

Handling and storage

Modified bitumen membranes are stored on pallets in a dry and cool place in an upright position. The rolls must be protected with plastic hoods or tarps. When the temperature exceeds + 40 °C, the rollers must be stored in a location that is protected from sunlight.

Checklist

Kerabit sealing adhesive for sealing seams and details.